

Cisco AnyConnect Secure Mobility Client

Easy to use. Highly secure. This is why the Cisco AnyConnect® Secure Mobility Client is so popular around the world. And customers know that with each new release, AnyConnect® consistently raises the bar for remote-access across a broad set of PCs and mobile devices.

Product Overview

As mobile workers roam to different locations, an always-on intelligent VPN helps AnyConnect client devices to automatically select the optimal network access point and adapt its tunneling protocol to the most efficient method. That may include the Datagram Transport Layer Security (DTLS) protocol for latency-sensitive traffic, voice over IP (VoIP) traffic, or TCP-based application access. Tunneling support is also available for IP Security Internet Key Exchange version 2 (IPsec IKEv2). Select application VPN access may be enforced on Apple iOS, Google Android (5.0 and later), and Samsung KNOX with the per-app VPN feature in Release 4.x.

AnyConnect 4.x supports robust unified endpoint compliance. It protects the integrity of the corporate network by restricting VPN access that terminates at the Cisco Adaptive Security Appliance, based on an endpoint's security posture. Endpoint posture assessment and remediation across wired and wireless environments validate the status of various antivirus, personal firewall, and antispyware products. Out-of-compliance endpoint enforcement provides options to remediate and implement additional system checks before access is granted.

The AnyConnect Secure Mobility solution has built-in web security and malware threat defense. Choose either the premises-based Cisco Web Security Appliance or cloud-based Cisco Cloud Web Security for reliable and highly secure employee access to corporate resources. Web security, malware threat defense, and remote access are brought together in a comprehensive and highly secure enterprise mobility solution. Consistent, context-aware security policies help ensure a protected and productive work environment.

With the Network Visibility module on Windows and Mac OS X platforms, administrators can monitor endpoint application usage to uncover potential behavior anomalies and to make more informed network-design decisions. Usage data can be shared with a growing number of Internet Protocol Flow Information Export (IPFIX)-capable network-analysis tools.

With its Cisco Advanced Malware Protection (AMP) Enabler, AnyConnect can assist with the deployment of Cisco AMP for Endpoints. This capability significantly expands endpoint threat protection to VPN-enabled endpoints or wherever AnyConnect services are in use (for 802.1X network access, posture, etc.). And it further reduces the potential of an attack from enterprise-connected hosts. Cisco AMP for Endpoints is licensed separately from AnyConnect.

In addition to industry-leading VPN capabilities, the AnyConnect mobility client helps enable IEEE 802.1X capability, providing a single authentication framework to manage user and device identity, as well as the network-access protocols required to move smoothly from wired to wireless networks. Consistent with its VPN functionality, the solution supports IEEE 802.1AE (MACsec) for data confidentiality, data integrity, and data-origin authentication on wired networks, safeguarding communication between trusted components of the network.

Figure 1 shows a VPN configuration on Microsoft Windows.

Figure 1. Icon and Sample VPN Configuration on Microsoft Windows


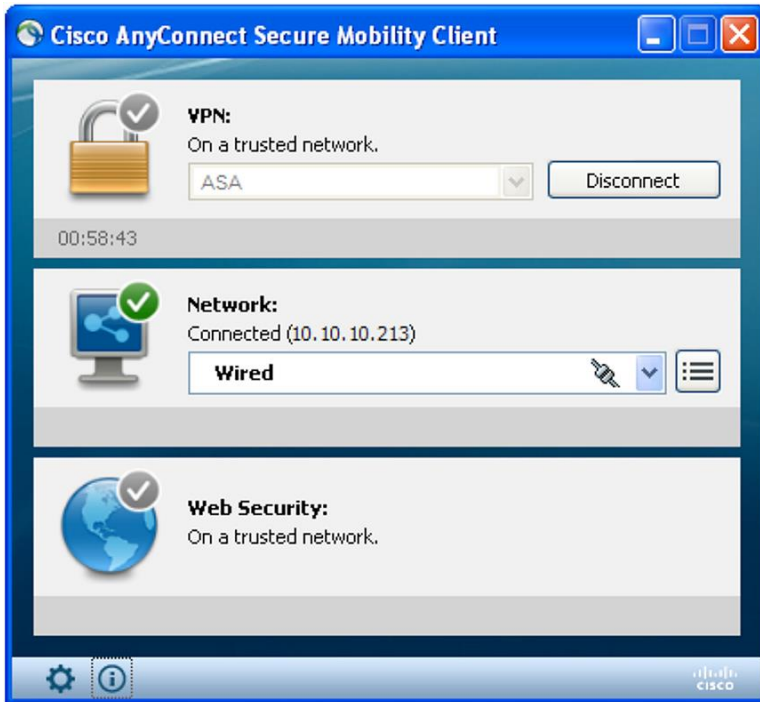


Figure 2 shows a VPN configuration on Apple OS X.

Figure 2. Icon and Sample VPN Configuration on Apple OS X

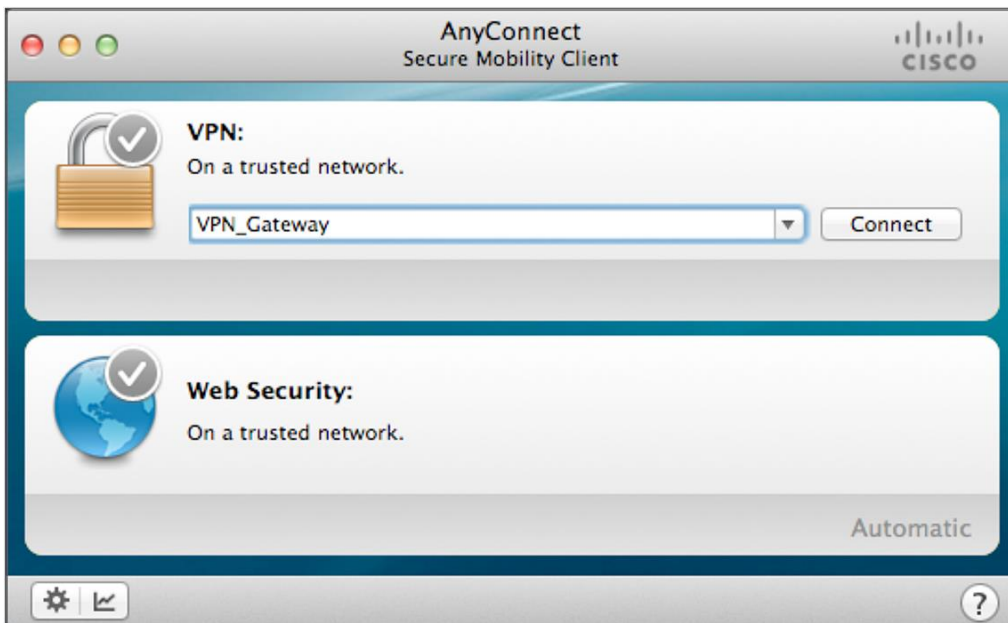


Client Modules

The AnyConnect client is a lightweight, highly modular security client providing easily customizable capabilities based on the individual needs of the business. Features such as VPN, 802.1X, compliance check, network visibility, integration with Cloud Web Security, and the ability to install or uninstall AMP for Endpoints are available in separately deployable modules or services, so organizations can select the features and functionality most applicable to their connectivity needs. This keeps AnyConnect nimble and operationally efficient while providing flexibility and benefit to the organization.

Figure 3 shows the AnyConnect unified endpoint compliance across wired and wireless environments.

Figure 3. Endpoint Compliance Checks

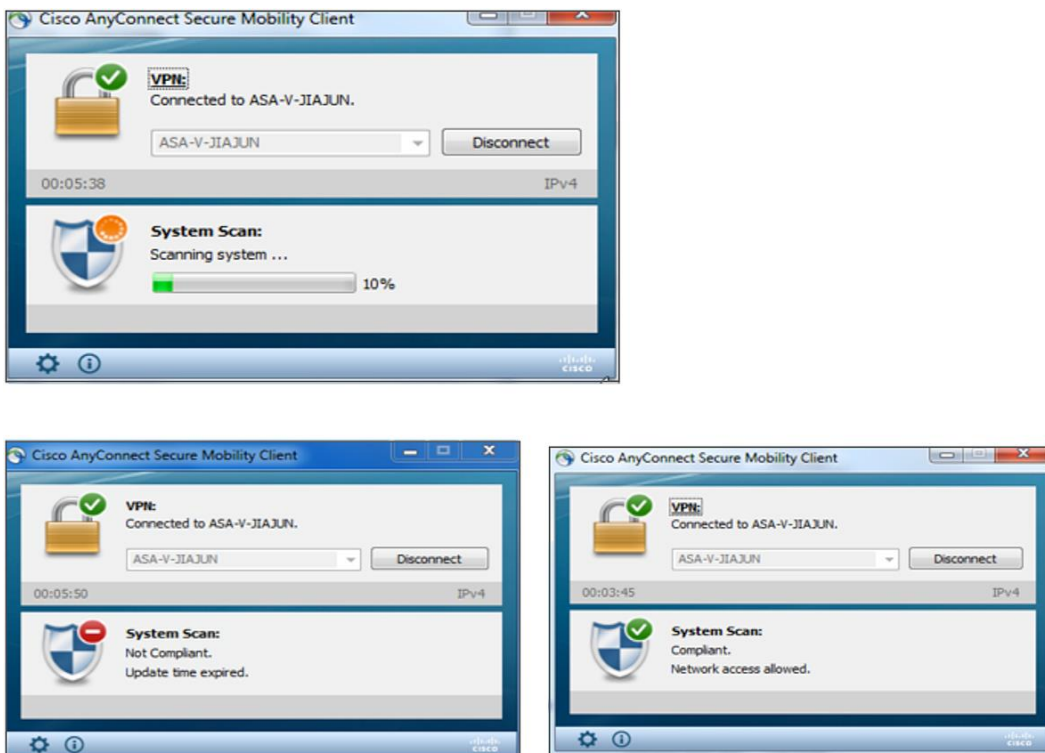

Features and Benefits

Table 1 lists the features and benefits of the Cisco AnyConnect Secure Mobility Client.

Table 1. Features and Benefits

Feature	Benefits and Details
Remote Access VPN	
Broad operating system support	<ul style="list-style-type: none"> • Windows 10, 8.1, 8, and 7. • Mac OS X 10.8 and later. • Linux Intel (x64). • See the AnyConnect Mobile data sheet for mobile platform information.
Software access	<ul style="list-style-type: none"> • Downloads are available in the Cisco.com Software Center. • Technical support and software entitlement for AnyConnect is included with all term-based Plus and Apex licenses, and it can be purchased separately for the Plus perpetual license. • The contract number must be linked to Cisco.com ID. See the AnyConnect ordering guide for details.

Feature	Benefits and Details
Optimized network access: VPN protocol choice SSL (TLS and DTLS); IPsec IKEv2	<ul style="list-style-type: none"> AnyConnect provides a choice of VPN protocols, so administrators can use whichever protocol best fits their business needs. Tunneling support includes SSL (TLS 1.2 and DTLS) and next-generation IPsec IKEv2. DTLS provides an optimized connection for latency-sensitive traffic, such as VoIP traffic or TCP-based application access. TLS 1.2 (HTTP over TLS or SSL) helps ensure availability of network connectivity through locked-down environments, including those using web proxy servers. IPsec IKEv2 provides an optimized connection for latency-sensitive traffic when security policies require the use of IPsec.
Optimal gateway selection	<ul style="list-style-type: none"> Determines and establishes connectivity to the optimal network-access point, eliminating the need for end users to determine the nearest location.
Mobility friendly	<ul style="list-style-type: none"> Designed for mobile users. Can be configured so that the VPN connection remains established during IP address changes, loss of connectivity, or hibernation or standby. With Trusted Network Detection, the VPN connection can automatically disconnect when an end user is in the office and connect when a user is at a remote location.
Encryption	<ul style="list-style-type: none"> Supports strong encryption, including AES-256 and 3DES-168. (The security gateway device must have a strong-crypto license enabled.) Next-generation encryption, including NSA Suite B algorithms, ESPv3 with IKEv2, 4096-bit RSA keys, Diffie-Hellman group 24, and enhanced SHA2 (SHA-256 and SHA-384). Applies only to IPsec IKEv2 connections. An AnyConnect Apex license is required.
Wide range of deployment and connection options	<p>Deployment options:</p> <ul style="list-style-type: none"> Predeployment, including Microsoft Installer. Automatic security gateway deployment (administrative rights are required for initial installation) by ActiveX (Windows only) and Java. <p>Connection modes:</p> <ul style="list-style-type: none"> Standalone by system icon. Browser-initiated (web launch). Clientless portal initiated. CLI initiated. API initiated.
Wide range of authentication options	<ul style="list-style-type: none"> RADIUS. RADIUS with password expiry (MSCHAPv2) to NT LAN Manager (NTLM). RADIUS one-time password (OTP) support (state and reply message attributes). RSA SecurID (including SoftID integration). Active Directory or Kerberos. Embedded certificate authority (CA). Digital certificate or smartcard (including machine-certificate support), auto- or user-selected. Lightweight Directory Access Protocol (LDAP) with password expiry and aging. Generic LDAP support. Combined certificate and username-password multifactor authentication (double authentication).
Consistent user experience	<ul style="list-style-type: none"> Full-tunnel client mode supports remote-access users requiring a consistent LAN-like user experience Multiple delivery methods help ensure broad compatibility of AnyConnect User may defer pushed updates Customer experience feedback option is available
Centralized policy control and management	<ul style="list-style-type: none"> Policies can be preconfigured or configured locally and can be automatically updated from the VPN security gateway. API for AnyConnect eases deployments through webpages or applications. Checking and user warnings are issued for untrusted certificates. Certificates can be viewed and managed locally.

Feature	Benefits and Details
Advanced IP network connectivity	<ul style="list-style-type: none"> Public connectivity to and from IPv4 and IPv6 networks Access to internal IPv4 and IPv6 network resources Administrator-controlled split-tunneling and all-tunneling network access policy Access control policy Per-app VPN policy for Google Android (Lollipop) and Samsung KNOX (new in Release 4.0; requires Cisco ASA 5500-X with OS 9.3 or later and AnyConnect 4.0 licenses) <p>IP address assignment mechanisms:</p> <ul style="list-style-type: none"> Static Internal pool Dynamic Host Configuration Protocol (DHCP) RADIUS/Lightweight Directory Access Protocol (LDAP)
Robust unified endpoint compliance (Apex license required)	<ul style="list-style-type: none"> Endpoint posture assessment and remediation are supported for wired and wireless environments (replacing the Cisco Identity Services Engine NAC Agent). Requires Identity Services Engine 1.3 or later with Identity Services Engine Apex license. ISE Posture (working in conjunction with ISE) and Hostscan (VPN only) seek to detect the presence of antimalware software, Windows service packs and patching state, and a range of other software services on the endpoint system prior to granting network access. Administrators also have the option of defining custom posture checks based on the presence of running processes. ISE Posture and Hostscan can detect the presence of a watermark on a remote system. The watermark can be used to identify assets that are corporate owned and provide differentiated access as a result. The watermark-checking capability includes system registry values, file existence matching a required CRC32 checksum, and a range of other capabilities. Additional capabilities are supported for out-of-compliance applications. Functions vary by operating system. See the Hostscan Support charts for detailed information.
Client firewall policy	<ul style="list-style-type: none"> Provides added protection for split-tunneling configurations Used in conjunction with the AnyConnect client to allow for local-access exceptions (for example, printing, tethered device support, and so on) Supports port-based rules for IPv4 and network and IP access control lists (ACLs) for IPv6 Available for Windows and Mac OS X platforms
Localization	<p>In addition to English, the following language translations are included:</p> <ul style="list-style-type: none"> Czech (cs-cz) German (de-de) Spanish (es-es) French (fr-fr) Japanese (ja-jp) Korean (ko-kr) Polish (pl-pl) Simplified Chinese (zh-cn) Chinese (Taiwan) (zh-tw) Dutch (nl-nl) Hungarian (hu-hu) Italian (it-it) Portuguese (Brazil) (pt-br) Russian (ru-ru)
Ease of client administration	<ul style="list-style-type: none"> Administrators can automatically distribute software and policy updates from the headend security appliance, thereby eliminating administration associated with client software updates. Administrators can determine which capabilities to make available for end-user configuration. Administrators can trigger an endpoint script at connect and disconnect times when domain login scripts cannot be utilized. Administrators can fully customize and localize end-user visible messages.
Profile editor	<ul style="list-style-type: none"> AnyConnect policies may be customized directly from the Cisco Adaptive Security Device Manager (ASDM).
Diagnostics	<ul style="list-style-type: none"> On-device statistics and logging information are available. Logs can be viewed on device. Logs can be easily emailed to Cisco or an administrator for analysis.
Federal Information Processing Standard (FIPS)	<ul style="list-style-type: none"> FIPS 140-2 level 2 compliant (platform, feature, and version restrictions apply)

Feature	Benefits and Details
Secure Mobility and Network Visibility	
Web security integration (Cloud Web Security license required)	<ul style="list-style-type: none"> • Uses Cloud Web Security, the largest global provider of software-as-a-service (SaaS) web security, to keep malware off corporate networks and control and safeguard employee web usage • Supports cloud-hosted configurations and dynamic loading • Gives organizations flexibility and choice by supporting cloud-based services in addition to premises-based services • Integrates with the Web Security Appliance • Supports Trusted Network Detection • Enforces security policy in every transaction, independent of user location • Requires always-on highly secure network connectivity with a policy to permit or deny network connectivity if access becomes unavailable • Detects hotspots and captive portals
Network Visibility module (Apex license required)	<ul style="list-style-type: none"> • Captures endpoint flows with rich context for user, endpoint, application, location, and destination • Uses flexible collection settings on and off premises • Uncovers potential behavior anomalies by monitoring application usage • Allows for more informed network-design decisions • Can share usage data with a growing number of Internet Protocol Flow Information Export (IPFIX)-capable network-analysis tools
Advanced Malware Protection (AMP) for Endpoints Enabler (AMP for Endpoints licensed separately)	<ul style="list-style-type: none"> • Simplifies the enablement of threat protection services to AnyConnect endpoints by distributing and enabling Cisco AMP for Endpoints • Extends endpoint threat services to remote endpoints, increasing endpoint threat coverage • Provides more proactive protection to further assure an attack is mitigated at the remote endpoint quickly
Broad operating system support	<ul style="list-style-type: none"> • Windows 10, 8.1, 8, and 7 • Mac OS X 10.8 and later
Network Access Manager and 802.1X	
Media support	<ul style="list-style-type: none"> • Ethernet (IEEE 802.3) • Wi-Fi (IEEE 802.11a/b/g/n)
Network authentication	<ul style="list-style-type: none"> • IEEE 802.1X-2001, 802.1X-2004, and 802.1X-2010 • Enables businesses to deploy a single 802.1X authentication framework to access both wired and wireless networks • Manages the user and device identity and the network access protocols required for highly secure access • Optimizes the user experience when connecting to a Cisco unified wired and wireless network
Extensible Authentication Protocol (EAP) methods	<ul style="list-style-type: none"> • EAP Transport Layer Security (TLS) • EAP-Protected Extensible Authentication Protocol (PEAP) with the following inner methods: <ul style="list-style-type: none"> ◦ EAP TLS ◦ EAP-MSCHAPv2 ◦ EAP-Generic Token Card (GTC) • EAP-Flexible Authentication via Secure Tunneling (FAST) with the following inner methods: <ul style="list-style-type: none"> ◦ EAP TLS ◦ EAP-MSCHAPv2 ◦ EAP-GTC • EAP-Tunneled TLS (TTLS) with the following inner methods: <ul style="list-style-type: none"> ◦ Password Authentication Protocol (PAP) ◦ Challenge Handshake Authentication Protocol (CHAP) ◦ Microsoft CHAP (MSCHAP) ◦ MSCHAPv2 ◦ EAP-MD5 ◦ EAP-MSCHAPv2 • Lightweight EAP (LEAP), Wi-Fi only • EAP-Message Digest 5 (MD5), administrative configured, Ethernet only • EAP-MSCHAPv2, administrative configured, Ethernet only • EAP-GTC, administrative configured, Ethernet only

Feature	Benefits and Details
Wireless encryption methods (requires corresponding 802.11 NIC support)	<ul style="list-style-type: none"> • Open • Wired Equivalent Privacy (WEP) • Dynamic WEP • Wi-Fi Protected Access (WPA) Enterprise • WPA2 Enterprise • WPA Personal (WPA-PSK) • WPA2 Personal (WPA2-PSK) • CCKM (requires Cisco CB21AG Wireless NIC)
Wireless encryption protocols	<ul style="list-style-type: none"> • Counter mode with Cipher Block Chaining Message Authentication Code Protocol (CCMP) using the Advanced Encryption Standard (AES) algorithm • Temporal Key Integrity Protocol (TKIP) using the Rivest Cipher 4 (RC4) stream cipher
Session resumption	<ul style="list-style-type: none"> • RFC2716 (EAP TLS) session resumption using EAP TLS, EAP-FAST, EAP-PEAP, and EAP-TTLS • EAP-FAST stateless session resumption • PMK-ID caching (Proactive Key Caching or Opportunistic Key Caching), Windows XP only
Ethernet encryption	<ul style="list-style-type: none"> • Media Access Control: IEEE 802.1AE (MACsec) • Key management: MACsec Key Agreement (MKA) • Defines a security infrastructure on a wired Ethernet network to provide data confidentiality, data integrity, and authentication of data origin • Safeguards communication between trusted components of the network
One connection at a time	<ul style="list-style-type: none"> • Allows only a single connection to the network, disconnecting all others • No bridging between adapters • Ethernet connections automatically take priority
Complex server validation	<ul style="list-style-type: none"> • Supports “ends with” and “exact match” rules • Provides support for more than 30 rules for servers with no name commonality
EAP-Chaining (EAP-FASTv2)	<ul style="list-style-type: none"> • Differentiates access based on enterprise and non-enterprise assets • Validates users and devices in a single EAP transaction
Enterprise Connection Enforcement (ECE)	<ul style="list-style-type: none"> • Helps ensure that users connect only to the correct corporate network • Prevents users from connecting to a third-party access point to surf the Internet while in the office • Prevents users from establishing access to the guest network • Eliminates cumbersome blacklisting
Next-generation encryption (Suite B)	<ul style="list-style-type: none"> • Supports the latest cryptographic standards • Elliptic Curve Diffie-Hellman key exchange • Elliptic Curve Digital Signature Algorithm (ECDSA) certificates
Credential types	<ul style="list-style-type: none"> • Interactive user passwords or Windows passwords • RSA SecurID tokens • One-time password (OTP) tokens • Smartcards (Axalto, Gemplus, SafeNet iKey, Alladin) • X.509 certificates • Elliptic Curve Digital Signature Algorithm (ECDSA) certificates
Remote desktop support	<ul style="list-style-type: none"> • Authenticates remote user credentials to the local network when using Remote Desktop Protocol (RDP)
Operating systems supported	<ul style="list-style-type: none"> • Windows 10, 8.1,8 and 7

Platform Compatibility

AnyConnect is compatible with all [Cisco ASA 5500-X Series Firewalls and 5500 Series Enterprise Firewall Edition](#) models running Cisco ASA Software Release 8.0(4) or later. Deploying current appliance software releases is encouraged.

Certain features require later Cisco ASA Software releases or ASA 5500-X models.

Cisco supports AnyConnect VPN access to Cisco IOS® Release 15.1(2)T and later functioning as the security gateway with certain feature limitations. Please see [Features Not Supported on the Cisco IOS SSL VPN](#) for details.

Refer to <http://www.cisco.com/go/fn> for additional Cisco IOS feature support information.

Additional compatibility information may be found at <http://www.cisco.com/en/US/docs/security/asa/compatibility/asa-vpn-compatibility.html>.

Licensing Options

- AnyConnect Plus or Apex licenses are required for AnyConnect 4.x or later.
- Information on licensing options and ordering may be found in the ordering guide at: <http://www.cisco.com/c/dam/en/us/products/security/anyconnect-og.pdf>.

Cisco Capital

Financing to Help You Achieve Your Objectives

Cisco Capital can help you acquire the technology you need to achieve your objectives and stay competitive. We can help you reduce CapEx. Accelerate your growth. Optimize your investment dollars and ROI. Cisco Capital financing gives you flexibility in acquiring hardware, software, services, and complementary third-party equipment. And there's just one predictable payment. Cisco Capital is available in more than 100 countries. [Learn more](#).

For More Information

- Cisco AnyConnect Secure Mobility Client homepage: <http://www.cisco.com/go/anyconnect>
- Cisco AnyConnect documentation: <http://www.cisco.com/c/en/us/support/security/anyconnect-secure-mobility-client/tsd-products-support-series-home.html>
- Cisco AnyConnect for Mobile Platforms data sheet: http://www.cisco.com/c/en/us/products/collateral/security/anyconnect-secure-mobility-client/data_sheet_c78-527494.html
- Cisco ASA 5500-X Series Adaptive Security Appliances: <http://www.cisco.com/go/asa>
- Cisco Cloud Web Security: <http://www.cisco.com/go/cws>
- Cisco AMP for Endpoints: <http://www.cisco.com/c/en/us/products/security/fireamp-endpoints/index.html>
- Cisco AnyConnect License Agreement and Privacy Policy: http://www.cisco.com/c/en/us/td/docs/security/vpn_client/anyconnect/anyconnect40/license/end_user/AnyConnect-SEULA-v4-x.html



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)